PCT

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(54) Title: CEMENTING COMPOSITIONS AND APPLICATION OF SUCH COMPOSITIONS FOR CEMENTING OIL WELLS OR THE LIKE

(57) Abstract

The present invention provides cementing compositions for oil wells or the like comprising a hydraulic binder and reinforcing particles constituted by a flexible material of low compressibility, and with an average grain size of less than 500 μm. The compositions of the invention are of particular advantage when cementing zones which are subjected to extreme dynamic stresses, such as perforation zones and the junctions of a multi–branch lateral well. They are also highly suitable for producing plugs.

CEMENTING COMPOSITIONS AND APPLICATION OF SUCH
COMPOSITIONS FOR CEMENTING OIL WELLS OR THE LIKE

The present invention relates to techniques for
drilling oil, gas, water, or geothermal wells or the
like. More precisely, the invention relates to cementing
compositions which are particularly suitable for
cementing zones which are subjected to extreme dynamic
stresses.

In general, a well which is over a few hundred
meters deep is cased and the annular space between the
subterranean formation and the casing is cemented over
all or part of its depth. Cementing essentially prevents
the exchange of fluid between the different layers of
formation traversed by the hole and controls the ingress
of fluid into the well, and in particular limits the
ingress of water. In production zones, the casing - and
the cement and the formation - is perforated over a
height of several centimeters.

The cement placed in the annular space of an oil
well is subjected to a number of stresses throughout the
lifetime of the well. The pressure inside a casing can
increase or decrease because the fluid which fills it can
change or because a supplemental pressure is applied to
the well, for example when the drilling fluid is replaced
by a completion fluid, or during a stimulation operation.
A change in temperature also creates stress in the
cement, at least during the transition period preceding
temperature equilibration between the steel and the
cement. In the majority of the above cases, the stress
event is sufficiently slow for it to be treated as a
static event.

However, the cement is subject to other stresses
which are dynamic in nature, either because they are
produced over a very short period or because they are
either periodic or repetitive in nature. Perforations
create an over-pressure of several hundred bars inside a
well which is dissipated in the form of a shock wave.
Further, perforations create a shock when the projectile
penetrates the cement and that shock subjects the zone
surrounding the hole to large forces over a depth of
several meters.

A further event, which is now routine in oil well
operations and which creates dynamic stresses in the
cement, is the opening of a window in a casing which is
already cemented to create a multi-branch lateral well.
Milling the steel over a depth of several meters followed
by drilling a lateral well subjects the cement to shocks
and vibrations which frequently damage it irreparably.

The present invention aims to provide novel
formulations, in particular for cementing regions of oil
wells or the like which are subjected to extreme dynamic
stresses.

In an article presented at the SPE (Society of
Petroleum Engineers) annual technical conference and
exhibition of 1997, Marc Thiercelin et al. (SPE 38598,
5-8 October 1997) - and French patent application
FR-A-97 11821 of 23rd September 1997, demonstrated that
the risk of rupture of a cement sleeve depends on the
thermoelastic properties of the casing, the cement and
the formation surrounding the well. A detailed analysis
of the mechanisms leading to rupture of the cement sleeve
has shown that the risk of rupture of a cement sleeve

following an increase in pressure and/or temperature in the well is directly linked to the tensile strength of the cement and is attenuated when the ratio between the tensile strength R_T of the cement and its Young's modulus E is increased.

Young's modulus is known to characterize the flexibility of a material. To increase the R_T/E ratio, it is advantageous to select materials with a low Young's modulus, in other words to select very flexible materials.

One known means for increasing the flexibility of a hardened cement is to reduce the density of the slurry by extending it with water. However, that leads to a degradation in the stability of the slurry, in particular with separation of the solid and liquid phases. Such phenomena can, of course, be controlled in part by adding materials such as sodium silicate, but the permeability of the hardened cement is nevertheless very high, which means that it cannot fulfill its primary function of isolating zones to prevent fluid migration, or at least it cannot guarantee its long-term isolation. Further, lightened cements have lower strength, in particular lower shock resistance, which constitutes a clear handicap for cements intended for use in zones which are subjected to extreme mechanical stresses such as perforation zones.

In the building field, incorporating particles of rubber into a concrete is known to result in better resilience, durability and elasticity (see, for example, A. B. Sinouci, Rubber-Tire Particles as Concrete Aggregate, Journal of Materials in Civil Engineering, 5,

4, 478-497 (1993)]. Concretes which include rubber particles in their formulation can be used, for example, in highway construction to absorb shocks, in anti-noise walls as a sound insulator and also in constructing

5   buildings to absorb seismic waves during earthquakes. In such applications, the mechanical properties in particular are improved.

In the field of oil well cementing, it is also known [Well Cementing 1990, E. B. Nelson, Schlumberger

10 Educational Services] that adding ground rubber particles (grain size in the range 4-20 mesh) can improve the impact strength and bending strength. Such an improvement in mechanical properties has also been indicated in Russian patents SU-1384724 and SU-1323699.

15 More recently, United States patent US-A-5 779 787 has proposed the use of particles derived from recycled automobile tires with grain size in the range 10/20 or 20/30 mesh, to improve the mechanical properties of hardened cements, in particular to improve their

20 elasticity and ductility.

The present invention aims to provide oil well cements reinforced with flexible particles, of low compressibility, with low density and with an average size not exceeding 500 μm.

25 The term "flexible particles" means particles made of a material having a Young's modulus of less than 5000 MPa, preferably less than 3000 MPa, more preferably less than 2000 MPa. The elasticity of the materials selected for these flexible particles is thus at least

30 four times greater than that of cement and more than

thirteen times that of the silica usually used as an additive in oil well cements.

The flexible particles added to the cementing compositions of the invention are also remarkable because of their low compressibility and are characterized by a Poisson ratio of over 0.3.

In order to lighten the slurry, it is also important for the density of the flexible particles to be less than 1.5 g/cm^3, preferably less than 1.2 g/cm^3, more preferably less than 1 g/cm^3. Preferably, this low density is intrinsic in the choice of the constituent materials and not by dint of high porosity or hollow particles. Preferably again, materials of low porosity are used.

Further, the particles must be insoluble in an aqueous medium which may be saline, and must be capable of resisting a hot basic medium, since the pH of a cementing slurry is generally close to 13 and the temperature in a well is routinely over 100°C.

Regarding particle size, essentially isotropic particles are preferred. Spherical or near spherical particles may be synthesized directly, but usually the particles are obtained by grinding, in particular cryo-grinding. The average particle size is generally in the range 80 μm to 500 μm, preferably in the range 100 μm to 400 μm. Particles which are too fine, or on the other hand too coarse, are difficult to incorporate into the mixture or result in pasty slurries which are unsuitable for use in an oil well.

Particular examples of materials which satisfy the various criteria cited above are thermoplastics (polyamide, polypropylene, polyethylene,…) or other

polymers such as styrene divinylbenzene or styrene butadiene (SBR). Recycled products are generally not preferred because of the variability in supply sources and in physico-chemical properties.

In addition to the flexible particles of the invention, the cementing compositions of the invention comprise a hydraulic binder, in general based on Portland cement and water. Depending on the specifications regarding the conditions for use, the cementing compositions can also be optimized by adding additives common to the majority of cementing compositions, such as suspension agents, dispersing agents, anti-foaming agents, expansion agents (for example magnesium oxide), fine particles, fluid loss control agents, gas migration control agents, retarders or setting accelerators. Thus the systems are either bimodal in type, the solid fraction of the slurry being constituted by a mixture of cement and flexible particles, or they can comprise three (trimodal) or more types of solid constituents, the solid mixture comprising fine micronic particles and possibly submicronic particles in addition to the cement and flexible particles.

The volume of flexible particles represents between 5% and 40% of the total volume of the cementing slurry, preferably between 10% and 35%, and preferably again, between 15% and 30% of the total slurry volume.

The formulations of the invention are preferably based on Portland cements in classes A, B, C, G and H as defined in Section 10 of the American Petroleum Institute's (API) standards. Classes G and H Portland cements are particularly preferred but other cements

which are known in this art can also be used to
advantage.   For low-temperature applications, aluminous
cements and Portland/plaster mixtures (deepwater wells,
for example) or cement/silica mixtures (for wells where
5   the temperature exceeds 120°C, for example) can be used.

The water used to constitute the slurry is
preferably water with a low mineral content such as tap
water. Other types of water, such as seawater, can
possibly be used but this is generally not preferable.

10   These particles with low density with respect to the
cement can reduce the density of the slurry and result in
lower permeability and better impact resistance.   It also
affects the flexibility of the system, since adding
flexible particles produces cements with a lower Young's

15   modulus.

The compositions comprising flexible particles of
the invention have remarkable mechanical properties which
render them particularly suitable for cementing in areas
of an oil well which are subjected to extreme stresses,

20   such as perforation zones, junctions for branches of a
lateral well or plug formation.

The present invention is illustrated below in the
following examples.

EXAMPLE 1: Formulations for cement slurries with styrene

25   **divinylbenzene particles**

In this example, particles of styrene divinylbenzene
(STDVB) with grain size in the range 45-100 mesh (355 μm-
150 μm) were tested.

The cement slurries were composed of Portland

30   Dyckerhoff North class G cement, styrene divinylbenzene
particles, water, a dispersing agent and a retarder. The

formulations and properties of the cement slurry are given in Tables 1 to 3; they were all optimized to the same temperature (76.7°C - 170°F); two cement slurry densities ρ were selected (1.677 g/cm³ - 14 ppg and

5   1.431 g/cm³ - 12 ppg). The dispersing agent was a polynaphthalene sulfonate; the retarder was a lignosulfonate.

TABLE 1: Formulations for cement slurries with STDVB particles

Slurry n°	STDVB %bwoc	%vol	Dispersing agent gps	Retarder gps	ρ g/cm³	Porosity of slurry φ
A1	27.8	24.8	0.012	0.06	1.666	45 %
A2	50.9	30.0	0.014	/	1.450	50 %

10

- bwoc is the abbreviation for "by weight of cement";
- %vol corresponds to the volume of flexible particles in the slurry (aqueous and solid phases);
- gps is the abbreviation for "gallons per sack", namely

15   3.78541 liters per sack of 42.637 kilograms (kg) of cement, in other words, 1 gps = 0.0888 liters (l) of additive per kg of Portland cement.

The rheology of the cement slurry and the free water were measured using the procedure recommended in API 10

20   (American Petroleum Institute). At laboratory temperature, the rheology was measured immediately after mixing and after 20 minutes of conditioning to temperature. The results are shown in Table 2. The rheology of a slurry is characterized by its plastic

25   viscosity PV (in cP or mPa.s), the conversion factor being equal to 1) and the yield point or Ty (in lbf/100ft², conversion to Pascals being obtained by

multiplying by 0.478803), assuming the slurry to be a
Bingham fluid.

**TABLE 2: Rheology and free water for systems with STDVB
particles**

Formulation	Rheology after mixing at laboratory temperature		Rheology after conditioning at 76.6°C		Free water after 2 hours (ml)
	PV (mPa.s)	Ty (lbf/100ft^2)	PV (mPa.s)	Ty (lbf/100ft^2)	
A1	35.4	3.0	66.4	7.2	2
A2	24.5	4.1	40.7	20.3	0

The development of the compressive strength during
setting of the cement was evaluated by UCA (Ultrasonic
Cement Analyzer) measurements. These measurements
enabled the setting time required to produce a given
strength (0.34 MPa - 50 psi and 3.4 MPa = 500 psi) and
the compressive strength Rt obtained after a given time
(72 hours) at a pressure of 3000 psi (20.7 MPa) to be
determined.

**TABLE 3: UCA and setting time at T = 76.6°C for systems
with STDVB particles**

N°	Time to 0.34 MPa at T (min)	Time to 3.4 MPa at T (min)	Compressive strength after 72 hours (psi)	Setting time (min)
A1	970	1088	3000	270
A2	171	383	1167	210

**EXAMPLE 2: Formulations for cement slurries with
polyamide particles**

The cement slurries were principally composed of
Portland Dyckerhoff North class G cement, polyamide
particles, water, a dispersing agent, a retarder and an
anti-foaming agent.

A number of polyamides were tested: Nylon 6, Nylon 12 and a polyamide 11, the principal characteristics of which are shown in Table 4.

TABLE 4: Characteristics of test polyamides

Source	Supplier	Product name	Polyamide	Average grain size (μm)	ρ (g/cm^3)
1	Goodfellow	AM306015	Nylon 6	350	1.13
2	Goodfellow	AM306010	Nylon 6	15-20	1.13
3	Elf Atochem	Rilsan	11	100	1.0
4	Huls	Vestosint 1111	Nylon 12	100	1.06

The formulations and properties of the cement slurry are shown in Tables 5 to 9. They were all formulated at the same temperature (76.7°C - 170°F), the same slurry density (14 ppg), and different grain sizes were studied. The dispersing agent used was a polynaphthalene sulfonate; the retarder was a lignosulfonate. The fine particles used for test B2 was filtered fly ash, a detailed description of which is given in French patent FR-A-96 1176. The magnesium oxide added for test B5 acted as an expansion agent.

TABLE 5: Cement slurry with polyamide particles - list of formulations

N	Description of solid fraction	Polyamide source
B1	Bimodal mixture: cement + polyamide	1
B2	Trimodal mixture: cement + polyamide + fine particles	1
B3	Trimodal mixture: cement + nylon 350 μm+ nylon 15-20 μm	1 and 2
B4	Bimodal mixture: cement + polyamide	3
B5	Bimodal mixture: cement + polyamide + magnesium oxide	1
B6	Bimodal mixture: cement + polyamide	4

It should be noted that it was not possible to prepare a slurry with source 2 alone as the slurry was

too viscous even with a low concentration of reinforcing
particles.

TABLE 6: Formulations for cement slurries with polyamide particles

	Polyamides %bwoc	%vol	Fine %bvob	Dispersing agent gps	Retarder gps	Anti-foaming agent gps	ρ g/cm^3	ϕ
B1	29.4	24.8	/	/	0.097	/	1.67	45%
B2	22.8	19.3	10	0.026	0.051	0.037	1.75	45%
B3	22.8	24.8	10	0.018	0.073	/	1.67	45%
B4	17.8	16.8	/	/	0.066	0.033	1.67	52%
B6	18.1	16.7	/	/	0.067	0.033	1.67	52%

TABLE 7: Formulation for cement slurry with polyamide particles and an expansion agent

	Polyamides %bwoc	Expansion agent %bwoc	Dispersing agent gps	Retarder gps	Anti-foaming agent gps	Extension agent gps	ρ g/cm^3	ϕ
B5	24.9 (22.6% vol)	5	0.059	0.176	0.035	0.106	1.77	45%

TABLE 8: Rheology and free water for systems with polyamide particles

Formulation	Rheology after mixing at laboratory temperature		Rheology after conditioning at 76.6°C		Free water after 2 hours (ml)
	PV (mPa.s)	Ty (lbf/100ft^2)	PV (mPa.s)	Ty (lbf/100ft^2)	
B1	156.2	1.0	118.9	17.0	1.5
B2	203.9	26.6	215.4	35.4	2.0
B3	475.8	13.6	294.6	26.5	0
B4	47.7	4.4	34.4	30.2	3.0
B5	230.5	1.0	48.9	26.4	0.5
B6	48.6	4.6	44.1	24.3	3

**TABLE 9: UCA and setting time at 76.7°C (170°F) for
systems with polyamide particles**

Formulation	Time to 0.34 MPa at T (min)	Time to 3.4MPa at T (min)	Compressive strength after 72 hours (psi)	Setting time (min)
B1	1695	1916	1500	348
B2	525	585	2377	221
B3	580	699	1703	170
B4	708	827	1829	205
B5	661	738	2167	263

**EXAMPLE 3: Formulations for cement slurries with
polypropylene particles**

The cement slurries were composed of Portland
Dyckerhoff North Class G cement, polypropylene particles,
water, a dispersing agent, a retarder and an anti-foaming
agent. The polypropylene used in this Example was
produced by ICO Polymer under the trade name ICORENE
9013P. Its density was 0.905 g/cm^3. Its initial grain
size specification was such that at most 5% of particles
had a size of more than 800 μm, 30% had a size of more
than 500 μm and less than 5% of the particles had a size
of less than 200 μm. For these tests, the particles were
also sieved at 300 μm. The polypropylene from Solvay,
trade name ELTEX P HV001PF, was also tested but it was
found to be difficult to mix and optimize, in particular
for our bimodal systems. This can be explained by its
very broad grain size specifications since they were in
the range 30 μm-1500 μm; this effect was reinforced by
the low density of the polypropylene.

The formulations and properties of the cement slurry
are shown in Tables 10 to 12; they were all optimized at
the same temperature (76.7°C - 170°F), and a single

cement slurry density was selected (14 ppg). The
dispersing agent used was a polynaphthalene sulfonate;
the retarder was a lignosulfonate. Formulation 1 was
constituted by a bimodal mixture (cement + polypropylene
particles); formulation 2 was a trimodal mixture (cement
+ polypropylene particles + fine particles).

TABLE 10: Formulations for cement slurries with polypropylene particles

N°	Polypropylene %bwoc	%vol	Fine %bvob	Dispersing agent gps	Retarder gps	Anti-foaming agent gps	ρ g/cm³	φ
C1	19.4	19.4	0	0.022	0.045	0.030	1.67	45%
C2	23.9	23.9	10	0.059	0.046	0.039	1.65	42%

- %bvob is the abbreviation for "by weight of blend", and
is the proportion of fine particles in the mixture of
solid cement particles, flexible particles, fines.

TABLE 11: Rheology and free water for systems with polypropylene particles

Formulation	Rheology after mixing at laboratory temperature		Rheology after conditioning at 76.6°C		Free water after 2 hrs (ml)
	PV (mPa.s)	Ty (lbf/100ft²)	PV (mPa.s)	Ty (lbf/100ft²)	
C1	175	6.1	228	13.1	1.5
C2	387	1.9	332	18.8	0.1

TABLE 12: UCA and setting time at 76.7°C (170°F) for systems with polypropylene particles

Formulation	Time to 0.34 MPa at T (min)	Time to 3.4 MPa at T (min)	Compressive strength after 72 hours (psi)	Setting time (min)
C1	580	665	1911	173
C2	863	973	2089	369

14

EXAMPLE 4: Formulations for cement slurries with SBR particles

The cement slurries were composed of Portland Dyckerhoff North Class G cement, SBR particles, water, a dispersing agent and a retarder. The formulations for and properties of the cement slurries are shown in Tables 13 to 15; they were all optimized at the same temperature (76.7°C - 170°F), and a single cement slurry density (14 ppg) was selected. The dispersing agent used was a polynaphthalene sulfonate; the retarder was a lignosulfonate. Two different grain sizes were tested: 500 μm for formulation N1 and 200 μm for formulation N2.

TABLE 13: Formulations for cement slurries with SBR particles

	SBR %bwoc	%vol	Dispersing agent gps	Retarder gps	ρ g/cm^3	Porosity of slurry %
D1	30.6	24.8	0.037	0.025	1.69	45
D2	20.5	16.8	0.017	0.023	1.70	52

TABLE 14: Rheology and free water for systems with SBR particles

Formulation	Rheology after mixing at laboratory temperature		Rheology after conditioning at 76.6°C		Free water after 2 hrs (ml)
	PV (mPa.s)	Ty (lbf/100ft^2)	PV (mPa.s)	Ty (lbf/100ft^2)	
1	156.7	5.0	185.5	17.1	0
2	69.4	1.8	84.3	29.5	1.5

TABLE 15: UCA and setting time at 76.7°C (170°F) for systems with SBR particles

Formulation	Time to 0.34 MPa at T (min)	Time to 3.4 MPa at T (min)	Compressive strength after 72 hours (psi)	Setting time (min)
1	373	478	1535	130
2	291	492	1209	200

EXAMPLE 5: Optimized formulations with polyethylene particles

The cement slurries were composed of Portland Dyckerhoff North Class G cement, polyethylene particles, water, a dispersing agent, a retarder and an anti-foaming agent. The formulations for and properties of the cement slurries are shown in Tables 16 to 18; they were all optimized at the same temperature (76.7°C - 170°F), and a single density for the cement slurry (14 ppg) was selected. The dispersing agent used was a polynaphthalene sulfonate.

Formulation 1 contained ground high density polyethylene powder sold by BP Chemicals under the trade name RIGIDEX HD 3840-2WA. Its density was 0.94 g/cm^3 and its grain size was less than 500 μm. Formulation 2 also contained polyethylene powder with a density of 0.96 g/cm^3 and a grain size of less than 500 μm, but this was a recycled product.

TABLE 16: Formulations for cement slurries with polyethylene particles

	Polyethylene %bwoc %vol	Anti-foaming agent	Dispersing agent (gps)	Retarder	ρ g/cm^3	Porosity of slurry
E1	24.4 24.7	0.035	/	0.094	1.63	45%
E2	25.0 24.7	0.038	0.035	0.047	1.64	45%

TABLE 17: Rheology and free water for systems with

polyethylene particles

Formulation	Rheology after mixing at laboratory temperature		Rheology after conditioning at 76.6°C		Free water after 2 hours (ml)
	PV (mPa.s)	Ty (lbf/100ft^2)	PV (mPa.s)	Ty (lbf/100ft^2)	
E1	84.4	3.7	147.8	46.6	3
E2	82.9	5.1	54.7	7.5	

TABLE 18: UCA and setting time at 76.7°C (170°F) for

systems with polyethylene particles

Formulation	Time to 0.34 MPa at T (min)	Time to 3.4 MPa at T (min)	Compressive strength after 72 hours (psi)	Setting time (min)
E1	784	871	2315	187
E2	291	492	1209	200

EXAMPLE 6: Mechanical properties - bending and

compression

Bending and compression mechanical properties were

measured for cement slurries which contained flexible

particles. The exact formulations are given in Examples

1 to 6.

The influence of flexible particles on the

mechanical properties of a set cement was studied using

systems placed under high pressure and temperature in

high pressure and high temperature chambers for several

days to simulate the conditions encountered in an oil

well.

The bending tests were carried out on

3 cm × 3 cm × 12 cm prisms obtained from cement slurries

placed at 76.7°C (170°F) and 20.7 MPa (3000 psi) for

several days. The compression tests were carried out on

17

cubes with 5 cm (2 inch) sides obtained after several days at 76.7°C (170°F) and at 20.7 MPa (3000 psi).

For comparison purposes, systems with no flexible particles with the formulations given in Tables 19 and 20 were included:

- a NET "system" with a density of 1.89 g/cm³ (15.8 ppg) with 0.03 gps of anti-foaming agent (S1) as the sole additive;

- a 1.67 g/cm³ (14 ppg) system extended with bentonite (S2);

- a 1.44 g/cm³ system (12 ppg) extended with sodium silicate (S3).

TABLE 19: Formulations for cement slurries without flexible particles

N°	Extender %bwoc	Retarder gps	Anti-foaming agent gps	ρ (g/cm³)	Porosity of slurry %
S1	0	/	0.03	1.89	58
S2	4	0.08	0.03	1.68	68
S3	1.7	/	0.03	1.44	79

TABLE 20: Rheology and free water for systems without flexible particles

Formulation	Rheology after mixing at laboratory temperature		Rheology after conditioning at 76.6°C		Free water after 2 hours (ml)
	PV (mPa.s)	Ty (lbf/100ft²)	PV (mPa.s)	Ty (lbf/100ft²)	
S1	30.8	23.3	/	/	3.5
S2	12.7	3.5	11.2	26.7	3
S3	9.2	9.9	8.5	8.5	0

The results are shown in Tables 21 and 22. Table 21 concerns the bending strength (rupture modulus Mr and bending Young's modulus Ef). It also shows the number of days of cure under pressure and temperature. Table 22

shows the compressive strengths (compressive strength Cs and compression Young's modulus Ec).

The bending strength was easier to measure than the tensile strength. It was empirically estimated that the bending strength was twice as high as the tensile strength.

The bending and compression tests were used to calculate the quantity of energy released at rupture (obtained by integrating the stress-strain curve for a displacement in the range 0 to the maximum displacement of the load (corresponding to rupture).

Each property is represented as a function of the concentration of flexible particles expressed as the % by volume (Figures 1-6).

The results obtained for the flexible particles show that, for equal densities, adding particles simultaneously resulted in:

• a reduction in the rupture modulus (Figure 1);

• a reduction in the bending Young's modulus (Figure 2), but this tendency was not as clear for polyamide particles or for STDVB particles; the same was true for the compression Young's modulus (Figure 5);

• a reduction in the bending energy for STDVB (Figure 3);

• a reduction in the compressive strength for SBR particles, the contrary for polyamides regardless of the mixture or grain size. For polypropylene, different effects were observed: in the bimodal system, the compressive strength decreased slightly while in the trimodal system, the compressive strength increased; STDVB increased the compressive strength for 25% by volume (Figure 4).

TABLE 21: Bending results with flexible particles

Particles	Formulation	Number of days	Mr (MPa)	Ef (MPa)	Mr/Ef (× 1000)	Energy (J)
None	S1	5	8.47	5021.6	1.69	0.0706
None	S2	5	6.69	3758.8	1.81	0.0437
None	S3	3	1.19	504.2	2.37	0.0101
STDVB	A1	3	5.04	3595.0	1.44	0.0285
STDVB	A2	5	2.20	1338.6	1.68	0.0142
Polyamide	B1	5	5.60	2580.0	2.18	0.0490
Polyamide	B2	4	5.57	3377.5	1.65	0.0386
Polyamide	B3	3	6.13	3852.4	1.59	0.0397
Polyamide	B4	5	5.67	2813.4	2.04	0.0450
Polyamide	B5	4	4.75	3320.9	1.43	0.0288
Polypropylene	C1	5	4.53	2941.2	1.55	0.0296
Polypropylene	C2	5	5.25	3019.6	1.75	0.0389
SBR	D1	3	3.41	1674.6	2.10	0.0285
SBR	D2	3	4.12	2085.8	2.00	0.0326
Polyethylene	E1	4	4.21	2066.5	2.07	0.0343
Polyethylene	E2	3	4.22	2481.8	1.74	0.0305

TABLE 22: Compression results with flexible particles

Particles	Formulation	CS (MPa)	Ec (MPa)	CS/Ec (× 1000)	Energy (J)
None	S1	36.6	6257.3	5.85	16.22
None	S2	22.9	3341.8	6.88	12.97
None	S3	3.2	519.6	6.24	1.88
STDVB	A1	33.5	4880.7	6.88	18.84
STDVB	A2	13.3	2093.3	6.39	6.23
Polyamide	B1	27.9	3898.7	7.15	23.83
Polyamide	B2	27.9	4391.6	6.37	18.32
Polyamide	B3	30.7	4117.7	7.46	24.55
Polyamide	B4	32.5	4295.7	7.59	22.01
Polyamide	B5	26.4	4080.1	6.49	19.61
Polypropylene	C1	21.6	3977.2	5.49	14.28
Polypropylene	C2	26.3	3904.2	6.77	18.49
SBR	D1	10.11	1614.59	6.38	5.50
SBR	D2	14.52	2659.14	5.50	7.19
Polyethylene	E1	22.89	2863.17	8.01	20.65
Polyethylene	E2	20.30	2688.19	7.58	19.53

To compare these different systems, a flexibility criterion (MT) was defined: a cement was considered to be better if the ratio between its bending rupture modulus and its bending Young's modulus was higher.

This flexibility criterion can, for example, be seen in Figure 6 where the tensile strength of the cement is shown as a function of the bending Young's modulus of the cement. Figure 6 was obtained for the following casing geometry: external diameter 21.6 cm (8½"), internal diameter 17.8 cm (7"), grade 52 kg/m (35 lb/ft). The pressure increase in the well was assumed to be 34.5 MPa (5000 psi).

In this Figure, the minimum condition required is traced for three rock types (hard rock, medium rock and

weak rock). Each curve obtained defines the minimum
condition required to obtain good cement strength for the
geometry and the pressure increase selected for this
example. For a given rock, a cement was said to be

5   satisfactory if these characteristics (tensile strength
and bending Young's modulus) placed it above the curve.

       It appears that the different formulations satisfied
the flexibility criterion. However, these tendencies are
directly linked to a reduction in density resulting from

10   an increase in the concentration of flexible particles
and thus in the porosity of the system. Thus porosity
measurements were carried out and will be developed in
the following example.

EXAMPLE 7: Porosity measurements

15   The porosity of different cement samples obtained
after several days of curing at 76.7°C (170°F) and at
20.7 MPa (3000 psi) was measured for the different
formulations.

       The following principle was applied in measuring the

20   porosity measurement. Cylinders ½ inch in diameter and
1 cm long were cored from the cement sample which had
been hardened at temperature and pressure. They were
dried for two weeks in a freeze drier and during that
time the weight loss was studied as a function of time.

25   When the sample was dry (corresponding to a time-stable
weight), the real volume or framework volume Vs was
measured using a helium pycnometer; the mean volume Vb
was obtained from the external dimensions of the
cylinder. The difference in the two volumes (Vb - Vs)

30   gave the void volume and thus the porosity Φ of the
material which was accessible to the helium.

The porosity Φ of the slurry was the % by volume of water and liquid additives in the formulation. For each formulation, a volume percentage of flexible particles was calculated, and the effective porosity Φ was defined as the sum of the porosity of the hardened cement and the volume percentage of the flexible particles.

The results are shown in Table 23. It can be seen that the bending Young's modulus decreased almost linearly as a function of the effective porosity with a saturation threshold after 70% porosity (Figure 7). The same applies to the bending rupture modulus (Figure 8).

In conclusion, it appears that flexible particles can reduce the slurry density and thus act on the flexibility of the system to a minor extent. Primarily, flexible particles do not improve the above mechanical properties of cements.

TABLE 23: Porosity results

Flexible particles	N°	Φ slurry (1) %	Φmaterial (2) %	Particle volume (3) %	Φeffective (2)+(3) %
None	S1	60	36.9	0	36.9
None	S2	68	45.7	0	45.7
None	S3	79	65.5	0	65.5
STDVB	A1	45	23.6	24.8	48.4
STDVB	A2	50	36.6	30.0	66.6
Polyamide	B1	45	28.3	24.8	53.1
Polyamide	B2	45	29.6	19.3	48.9
Polyamide	B5	45	27.7	22.6	50.30

EXAMPLE 8: Measurement of Poisson ratio

The Poisson ratio was measured for different formulations with flexible particles to evaluate the compressibility of these systems. The compositions of

the different formulations were given in the preceding examples.

When a cement sample is subjected to a normal compressive force, while remaining within the elastic

5   region of the material, the longitudinal fibers of the sample are shortened the amount of which depends on the Young's modulus of the material (and on the stress applied and on the geometry of the sample). Simultaneously, the transverse dimension of the sample is

10   elongated. The ratio of the transverse deformation (relative to the transverse dimension) to the longitudinal deformation (longitudinal relative variation) is a dimensionless coefficient known as the Poisson ratio.

15   In our tests, the loading rate was 1 kN/min and the samples were cylindrical, with a diameter of 30 mm and a length of 60 mm. The longitudinal deformation was measured using LVDT type displacement gauges; the transverse deformation was measured using a strain gauge.

20   The samples were placed in a chamber filled with water for several days at 76.7°C (170°F) and at 3000 psi. These were the same aging conditions as those used to prepare the samples for the bending tests, for example. After curing, the samples were kept permanently submerged

25   and were simply drained before carrying out the mechanical tests which were then carried out on the moist samples.

The results are shown in Table 24 and demonstrate that adding flexible particles does indeed lead to an

30   increase in the Poisson ratio of the hardened cement, and because of this, to a reduction in the compressibility of

the hardened cement. Because of this lower
compressibility, a cement reinforced with flexible
particles can more readily distribute lateral forces or
can more readily distribute forces in response to a
5   compressive stress, which is very favorable to good zone
isolation.

TABLE 24: Poisson ratio results

Particles	N°	ρ(g/cm³)	ν
none	S1	1.89	0.15
none	S2	1.67	0.17
STDVB	A1	1.67	0.21
Polyamide	B1	1.67	0.20
Polyamide	B2	1.67	0.22
Polyamide	B3	1.67	0.21
Polyamide	B5	1.67	0.19
Polypropylene	C2	1.67	0.22

EXAMPLE 9: Permeability measurements

10   Cement samples were generated under pressure
(20.7 MPa - 3000 psi) and temperature (76.7°C) under the
same conditions as those used for the bending or
compression tests, and for the same time. The hardened
material obtained was cored into the following
15   dimensions: 51.4 mm in diameter and 25 mm in length.

The moist sample was placed in a Hassler type cell
which could apply a confinement pressure of 10 to 100
bars to the sample. A small constant flow of water (in
the range 0.005 ml/min to 1 ml/min) was sent through the
20   sample by means of a chromatography pump. The
differential pressure either side of the sample was
measured and recorded. The value recorded was that
corresponding to equilibrium.

The permeability K in milliDarcy was calculated

using Darcy's law: $K = 14700 \frac{Q\mu L}{AP}$ where Q is the flow rate

expressed in ml/s, μ is the viscosity of water in cP, L
is the length of the sample in cm, A is the surface area
of the sample in cm^2 and P is the differential pressure in
psi.

The results for the different formulations are shown
in Table 25 and demonstrate that, at a constant density,
adding flexible particles reduces the permeability of the
cement.

TABLE 25: Permeability results

Particle		ρ g/cm^3	Flexible particles %bwoc	Permeability to water, mD
None	S1	1.89	0	0.001
None	S2	1.67	0	0.008
None	S3	1.44	0	0.138
STDVB	A2	1.44	50.9	0.031
Polyamide	C1	1.67	29.4	0.001

EXAMPLE 10: Impact tests

Impact tests were carried out on cement samples.
These tests consisted of allowing a projectile to fall
onto disks of set cement from a height of 1 meter. The
disks were circular with a diameter of 70 mm and a
thickness of 10 mm. The dynamic load was measured and
recorded as a function of time.

The cement containing no flexible particles behaved
as a fragile material and the energy absorbed by the
sample was estimated to be less than 10 joules. The
energy absorbed by cements formulated with flexible

particles was considerably improved, as shown in Table
26.

TABLE 26: Results of impact with flexible particles

Particle		ρ g/cm³	Flexible particles % bwoc	Energy (J)
None	S1	1.89	0	7.4
None	S3	1.44	0	4.0
STDVB	A1	1.67	27.8	23.4

5   This good shock behavior is particularly important
when cementing multi-branch lateral wells.

EXAMPLE 11: Expansion measurements

       Linear expansion of cement slurries during setting
at a temperature simulating the well conditions was
10   measured in an annular expansion mold. This mold was
constituted by two concentric rings, respectively with a
diameter of 51 mm and 89 mm, placed between two flat
disks 22 mm apart. The external ring had longitudinal
slits and included two scales located either side of the
15   slit enabling the distance to be measured during
expansion of the cement. The cement slurry to be studied
was poured into the mold, and the mold was then placed in
a water bath thermostatted at 76.7°C (170°F). The slurry
remained in contact with the water throughout the test.
20   The expansion results are shown in Table 27 and
demonstrate that a slurry containing flexible particles
has expansion properties.

TABLE 27: Expansion results

Flexible particle		Particle % bwoc	Linear expansion, % after 1 day	Linear expansion, % after 2 days	Linear expansion, % after 7 days
None	S2	0	≤0	≤0	≤0
Polyamide	B1	29.4	0.02	/	0.16
Polyamide	B5	24.9	0.11	0.13	0.3
ST DVB	A1	27.8	0.01	0.08	0.09

The expansion behavior is of particular interest for preventing the cement from separating from the casing and to prevent it from separating from the formation. This behavior is more significant when a cement is flexible and thus is confined by the rock.

CLAIMS

1.   A cementing composition for an oil well or the like,
      comprising an hydraulic binder and reinforcing
      particles constituted by a flexible material which
      is of low compressibility and which has an average
      grain size of 500 μm.

2.   A cementing composition according to claim 1,
      characterized in that the Young's modulus of the
      material constituting the reinforcing particles is
      less than 5000 MPa, preferably less than 3000 MPa,
      more preferably less than 2000 MPa.

3.   A cementing composition according to any one of the
      preceding claims, characterized in that the Poisson
      ratio of the material constituting the reinforcing
      particles is more than 0.3.

4.   A cementing composition according to any one of the
      preceding claims, characterized in that the density
      of said reinforcing particles is less than 1.5 g/cm^3,
      preferably less than 1.2 g/cm^3.

5.   A cementing composition according to any one of the
      preceding claims, characterized in that the average
      size of the reinforcing particles is in the range
      80 μm to 500 μm, preferably in the range 100 μm to
      400 μm.

6.   A cementing composition according to any one of the
      preceding claims, characterized in that the
   reinforcing particles are formed from a material

selected from polyamide, polypropylene, polyethylene, styrene butadiene and styrene divinylbenzene.

7.   A cementing composition according to any one of the preceding claims, characterized in that the volume of the reinforcing particles represents 5% to 40% of the total volume of the cementing slurry.

8.   A cementing composition according to any one of the preceding claims, characterized in that it further comprises one or more additives of the following type: suspension agents, dispersing agents, anti-foaming agents, retarders, setting accelerators, fluid loss control agents, gas migration control agents, and expansion agents.

9.   Application of cementing compositions according to any one of claims 1 to 6 to cementing zones subjected to extreme dynamic stresses such as perforation zones and junctions in a multi-branch lateral well.

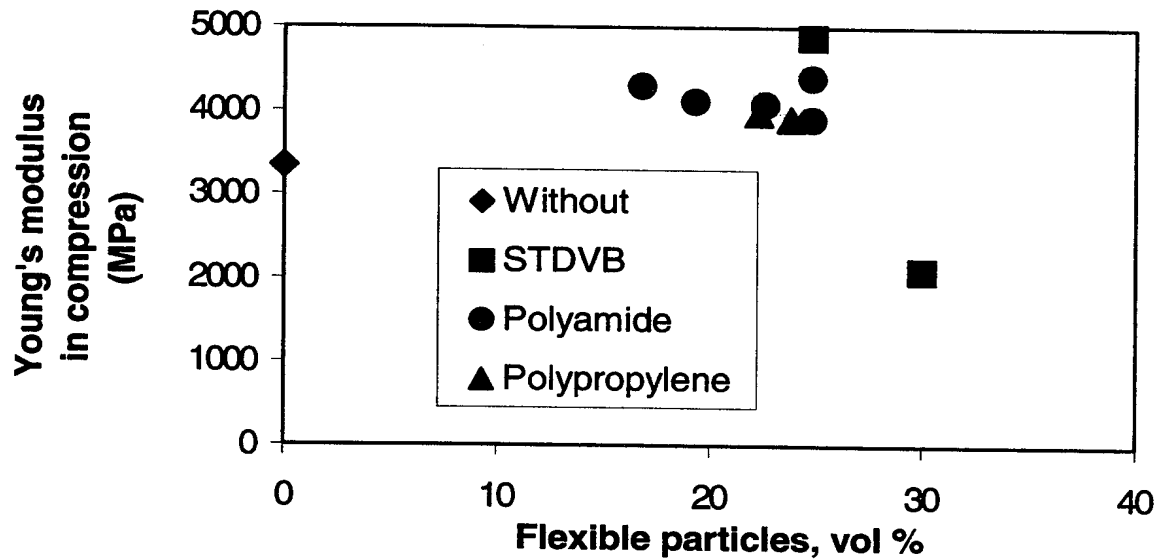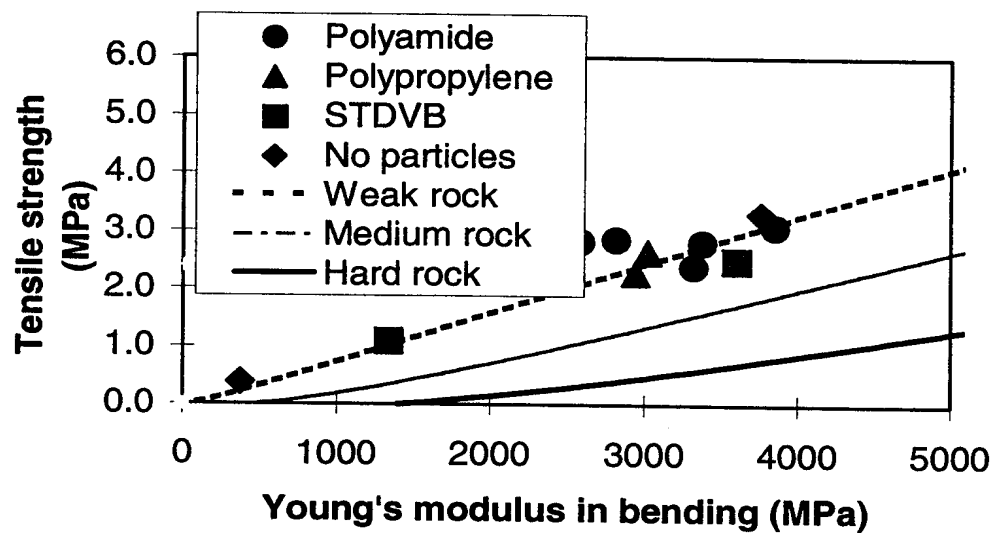10.   Application of cementing compositions according to any one of claims 1 to 6 to constituting cement plugs.
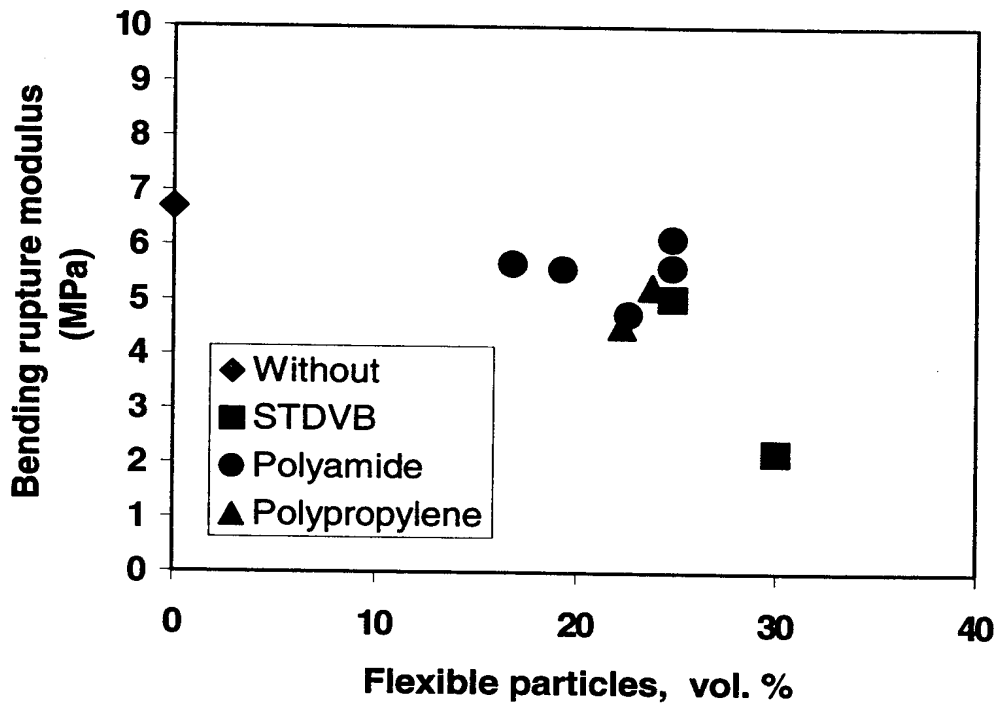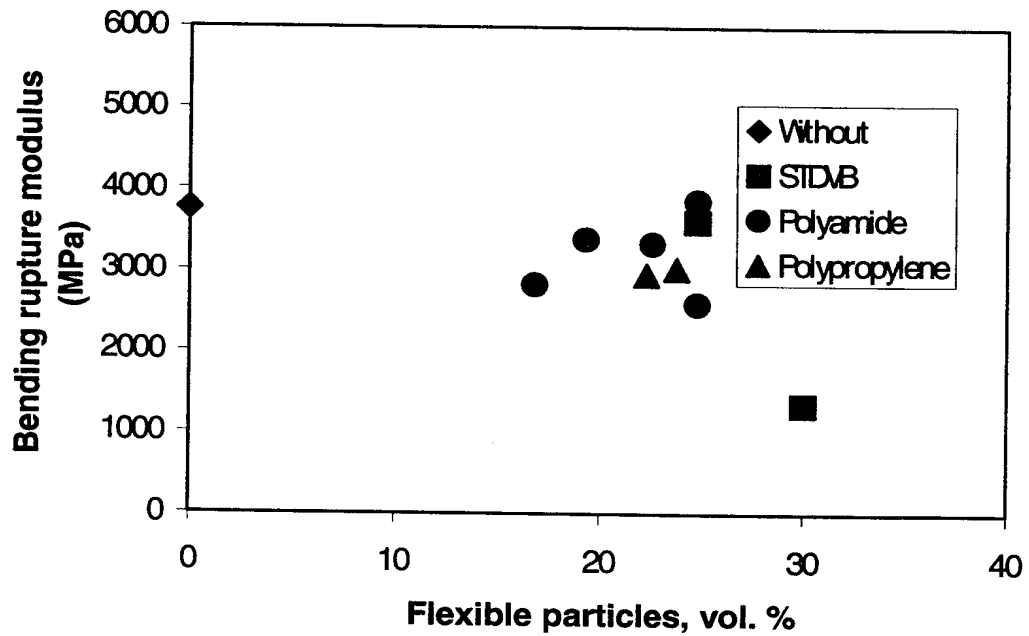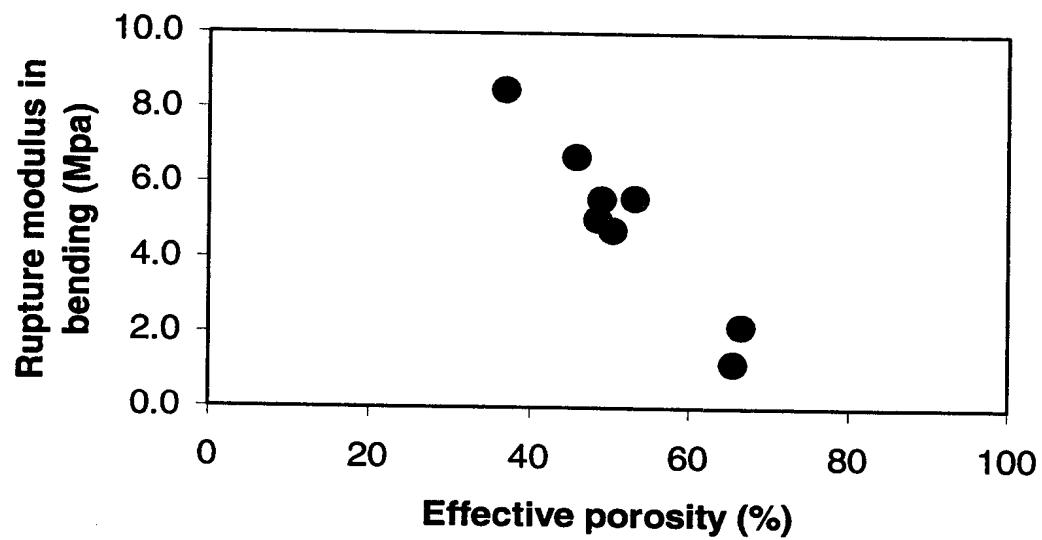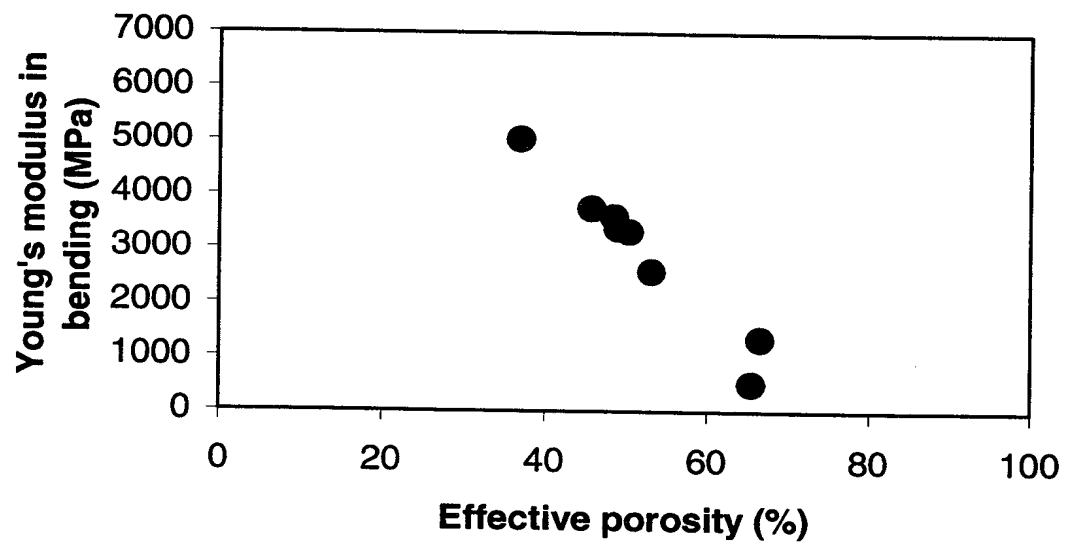
FIGURE 1
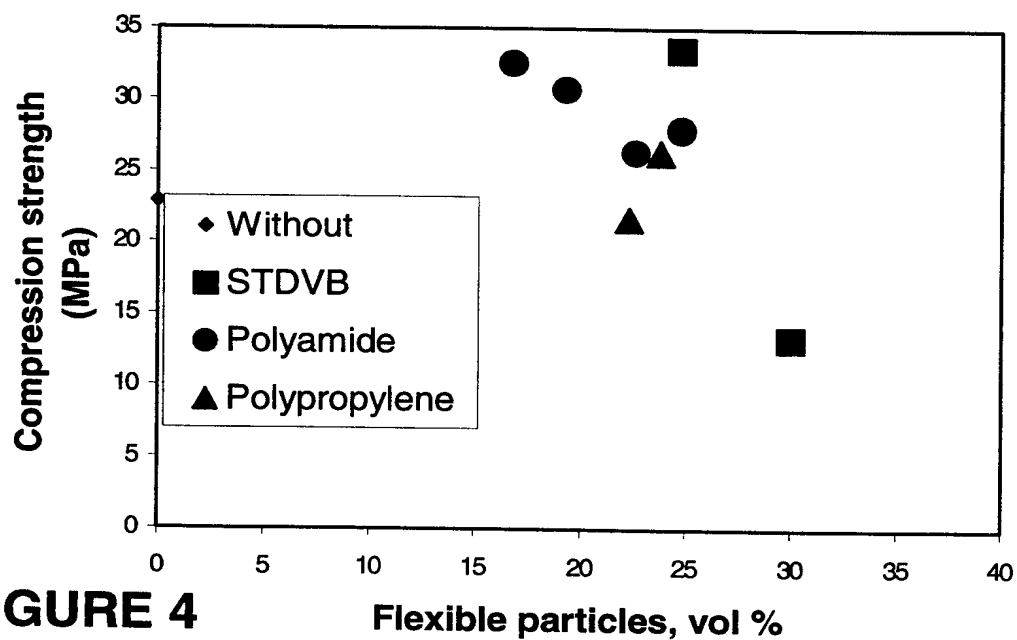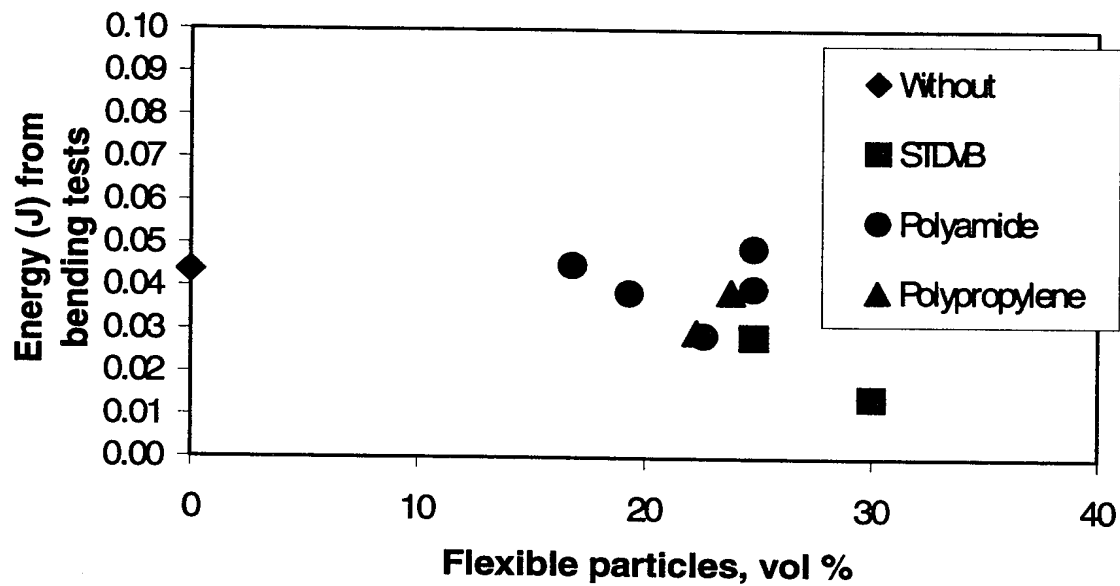
FIGURE 2

FIGURE 3

FIGURE 4

FIGURE 5

FIGURE 6

4/4

FIGURE 7

FIGURE 8

INTERNATIONAL SEARCH REPORT

Intei onal Application No

PCT/EP 99/09800

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7   C04B28/02   C04B16/04   //(C04B28/02,16:04),C04B111:50

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7   C04B   C09K   E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 779 787 A (MORGAN RICKEY L ET AL) 14 July 1998 (1998-07-14) cited in the application claims ---	1,7-9
A	EP 0 566 012 A (SICOWA VERFAHRENSTECH) 20 October 1993 (1993-10-20) claims --- -/--	1,6,8,9

[X] Further documents are listed in the continuation of box C.   [X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
16 March 2000	28/03/2000

| Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL – 2280 HV Rijswijk
Tel. (+31–70) 340–2040, Tx. 31 651 epo nl,
Fax: (+31–70) 340–3016 | Authorized officer

Theodoridou, E |

Form PCT/ISA/210 (second sheet) (July 1992)

page 1 of 2

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
A	CHEMICAL ABSTRACTS, vol. 108, no. 4, 25 January 1988 (1988-01-25) Columbus, Ohio, US; abstract no. 26310z, RAKHMATULLIN,T.K. ET AL: "Cementing of deep wells associated with absorbing strata" XP000158307 abstract & RAZVED. OKHR. NEDR, no. 7, 1987, pages 34-37, USSR	1,7,8

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5779787	A	14-07-1998	NONE		
EP 0566012	A	20-10-1993	CA	2093485 A	15-10-1993
			HU	67639 A	28-04-1995
			JP	6183798 A	05-07-1994
			NO	931355 A	15-10-1993
			OA	9875 A	15-09-1994